





## Set-up Instructions

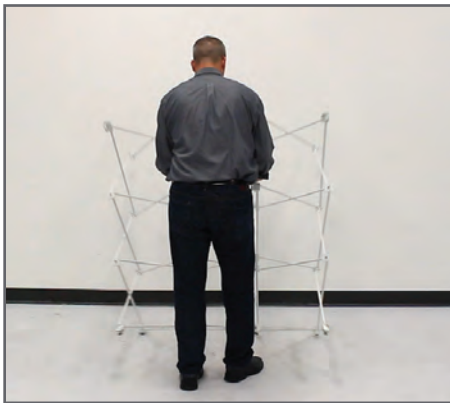




1. Set-up frame

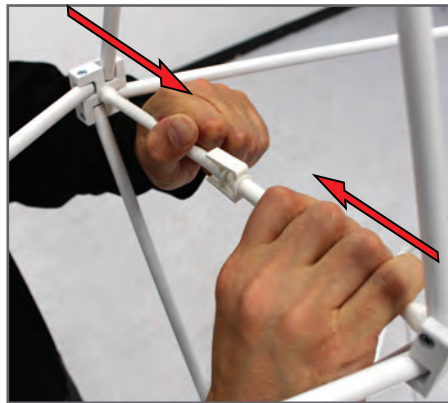

2. Lock the center hubs

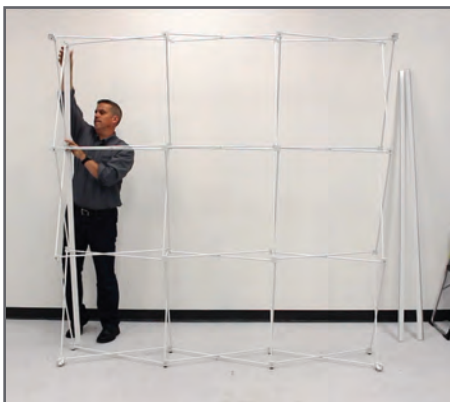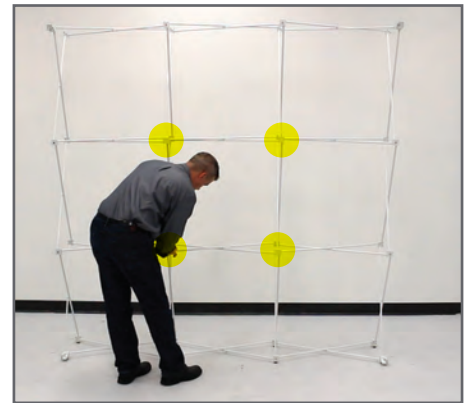


3. Hang the standard flat channel bars on the back of the frame

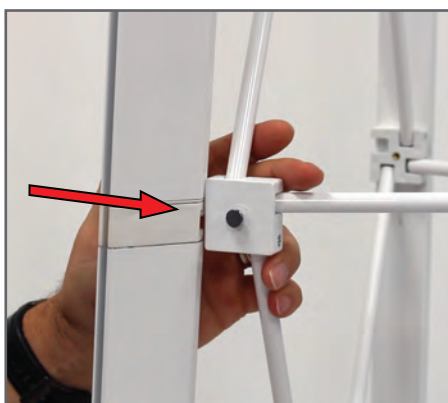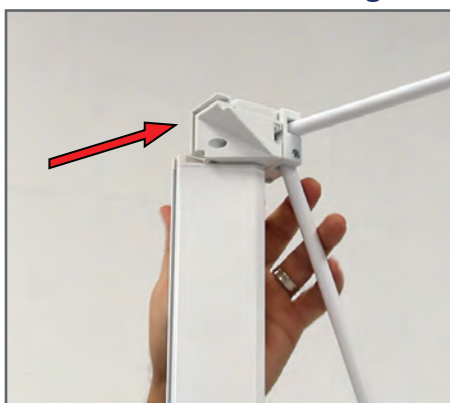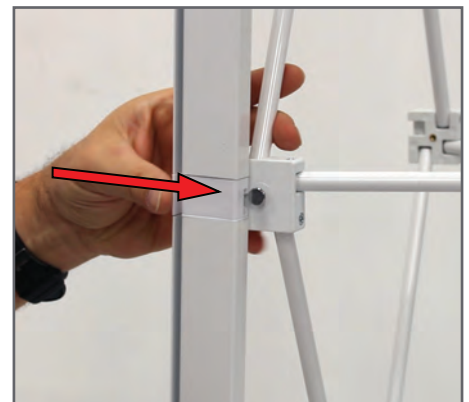

4. Hang the larger angled backlit channel bars on the front of the frame

## Install front graphic

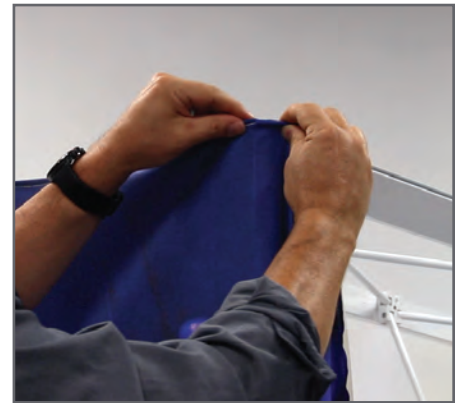

4. Install backlit front graphic, starting with endcaps



5. Move to center of frame then to corners.

# **NEXT! BACKLIT**

Backlit SEG Fabric Pop-Up System

## Install lights and back graphic




5. Set the LED light bars and brackets on the bottom scissors. There will be 2 light bars & brackets per quadrant. Connect the light bars together using the male/female barrel connections, and then plug into the power supply.



Close up of 2 light bars sitting on scissors



Completed rows of light bars


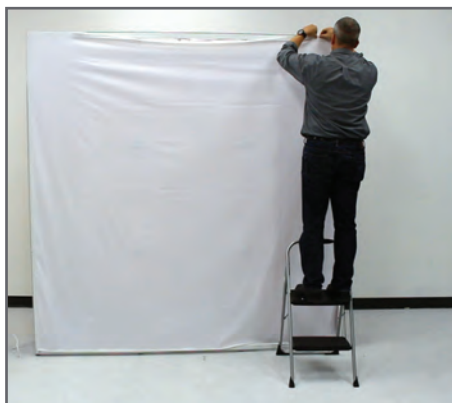


6. Install unprinted back graphic and topper



7. Finish by plugging in lights


# Radiance Lighting Set-Up

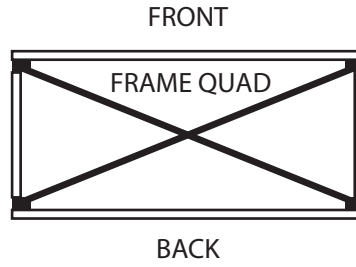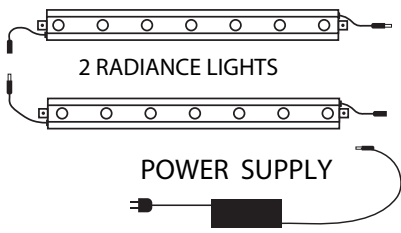

*Please keep the boxes for repackaging the lights*





- 1 After frame is assembled, position light mounting brackets into place on the bottom frame quad scissors.

*\* Note that the brackets are notched specifically to create a level platform for light placement and may need to be rotated to fit different frame systems.*

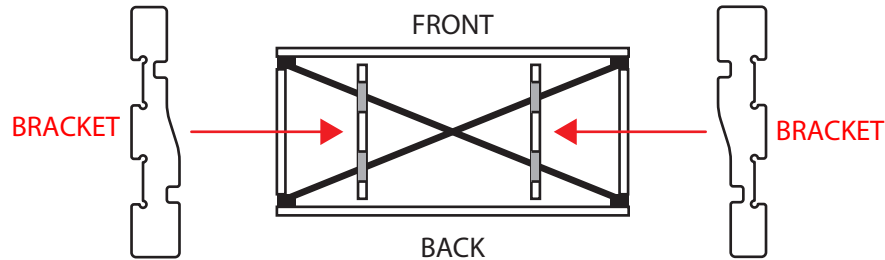

- 2 Place Radiance lights into the mounting brackets and connect the wires and power supply.

*\* Note that certain frame sizes will have multiple power supplies.*

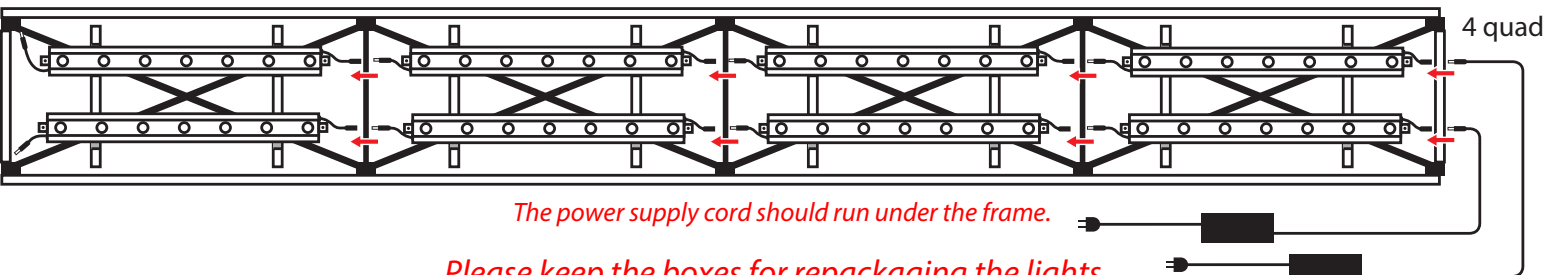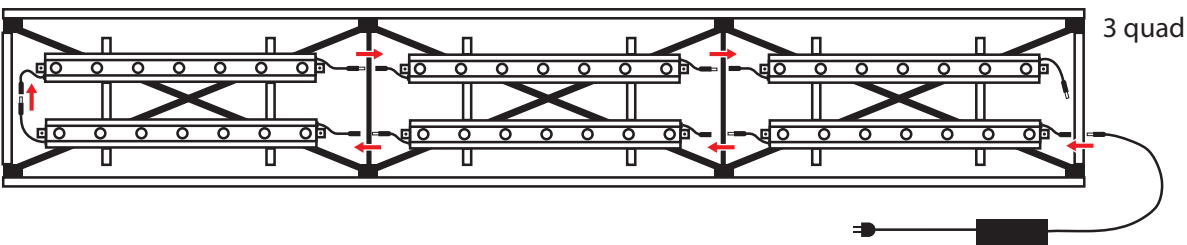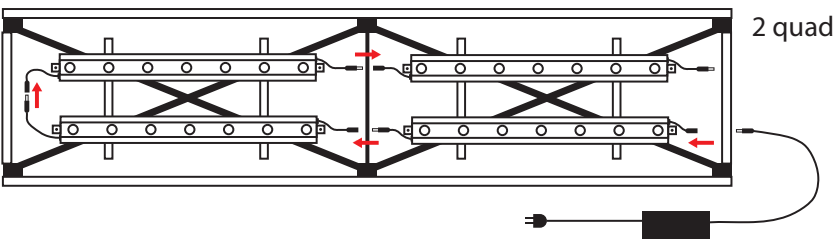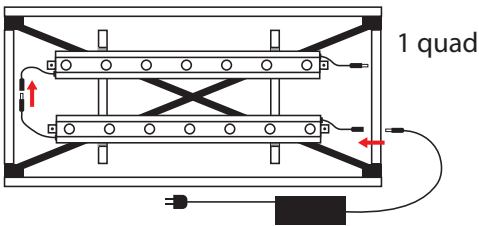

*The power supply cord should run under the frame.*

*Please keep the boxes for repackaging the lights*